

## 7: THE POWER OF THE VIGILON LOOP

## Manual Call Points

# GENT

by Honeywell



Manual Call Point


TECHNICAL SPECIFICATION	
Max Quantity per Loop	200
Operating Temperature	-25°C to 70°C
Ingress Protection	Standard IP43, Special IP55 (with cover and backbox)
Relevant Standard	EN54 Part 11
Approx Weight	0.11Kg
Device Load Factor	1

An addressable call point with a response time less than 1 second.

Versions available include:

- Resettable or break glass
- Lift up protective covers
- Keyswitch
- IP55 rated – when fitted with cover and surface box

## Dimensions (mm)

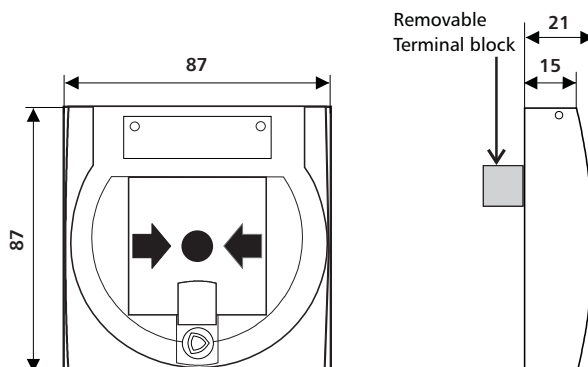

## ORDER CODES

Manual Call Point (Glass)	S4-34800
Manual Call Point (Glass) with Protective cover	S4-34842
Manual Call Point with Resettable Element	S4-34805
Manual Call Point with Resettable Element and Protective Cover	S4-34845
Resettable Element for MCP (Pack of 10)	S4-34890
Glass for MCP (Pack of 10)	S4-34891
Protective cover for MCP (Pack of 5)	S4-34892
Surface Back Box for MCP (Red Plastic) (Pack of 10)	S4-34895
MCP with Key Switch	S4-34807